



Hair trigger adapter installation

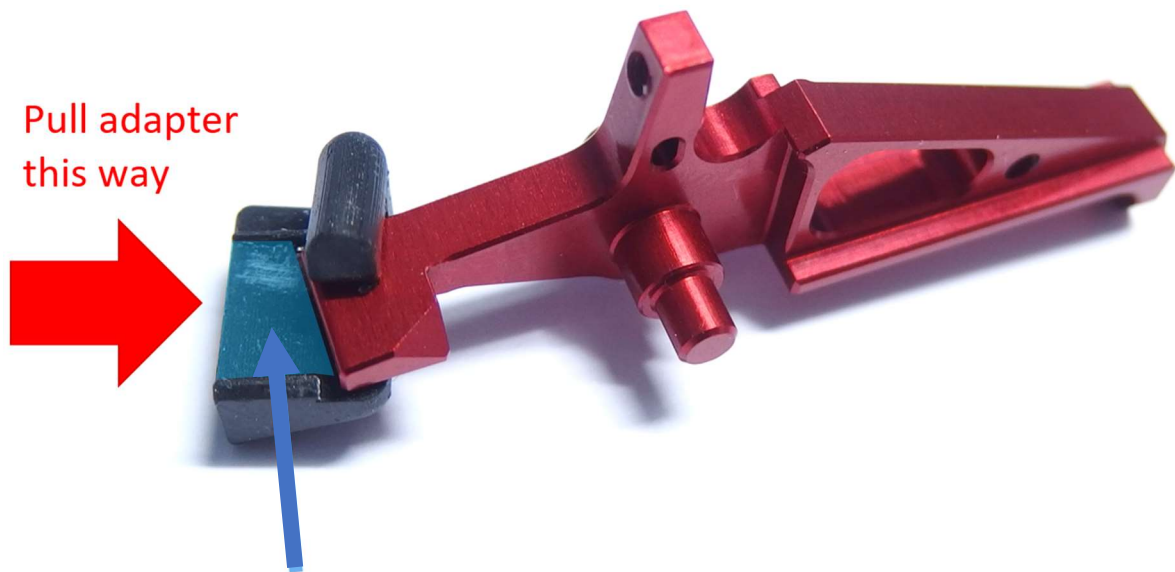

apply small amount of super glue

- apply glue on the blue part of hair trigger adapter
- push adapter from top to bottom with no space between adapter and the trigger
- Right position is when top part of the adapter is in line with the top of the trigger and it is locked

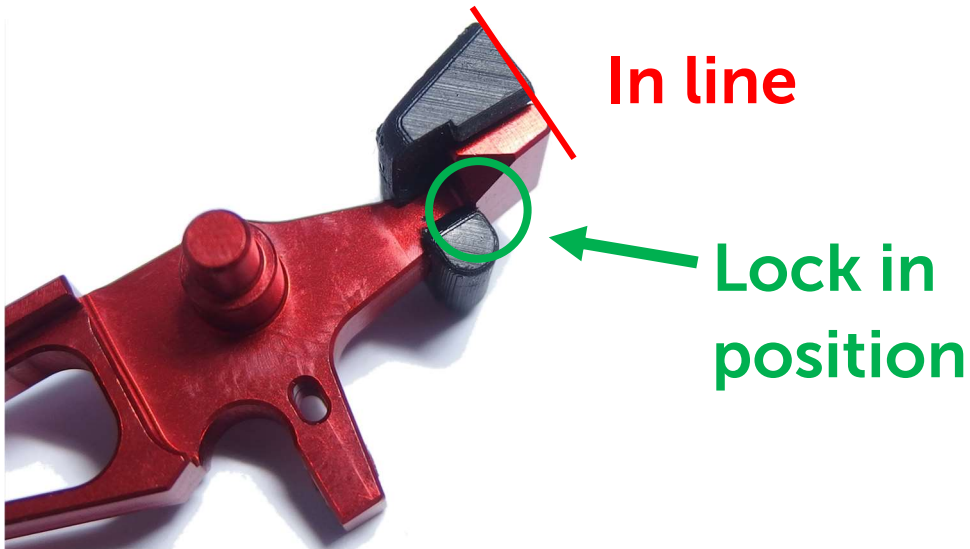

- RFTS spring on Leviathan-v2 optical has to be removed, see video:

<https://youtube.com/shorts/uSQGdz0PM8Q?feature=share>



Adapter has to be installed by an expert. He must know how to disassemble the replica.

Warranty does not cover: water immersion, defects or damage from accident, misuse, abuse, wrong installation, bad handling, any modification by user.

Exclusion of liability: Manufacturer Ing. Filip Němec is not liable for any damages, injuries or accidents of any kind resulting from the use of this product in the airsoft gun.



www.jefftron.net